

Flood King™

Portable Flood Water Extractor for Restoration

The **Flood King™** from U.S. Products is designed to be the most efficient and effective way to extract water from carpet at any water damaged facility.

This new and innovative design has increased the efficiency of the airflow by top mounting dual 3-stage vacuums, thus eliminating stand-pipes and bends into the tank. This significantly reduces restrictions in airflow and increases efficiency. Powerful yet efficient, the 3-stage vacuums only use 13 amps of power with one cord which is ideal for flooded sites where power may be limited.

The **Flood King's** ergonomic and lightweight design makes it easy to handle by one person with little or no bending or stooping. Large rear wheels carry the **Flood King** up and down stairs or nearly anywhere you need it to be, to complete the job with little effort or strain.

To increase productivity, two (2) diaphragm bilge pumps automatically and continuously remove the waste water from the 9 gallon recovery tank through a standard 3/4 inch garden hose at 10.5 gpm, thus eliminating the need to stop and empty the tank.

For power and versatility, test-drive the **Flood King** from U.S. Products today and see the difference high quality and innovation can make at your next restoration cleanup job.




Features & Benefits

- **Top Mounted, Dual Three-stage Vacuums** increase airflow efficiency and vacuum performance - improved water recovery.
- **Ergonomic, Upright, Compact Design** for easy maneuverability and easy storage.
- **Rotationally Molded Body with a Lifetime Warranty** for maximum durability.
- **Three-stage Filtration System** increases pump life.
- **Runs on a Single 25 foot Cord** at only 13 amps.
- **Auto-dump, 10.5 gallons Per Minute** with a 9 gallon recovery tank.

U.S. PRODUCTS
Innovative Cleaning Solutions

Flood King™ Portable Flood Water Extractor for Restoration

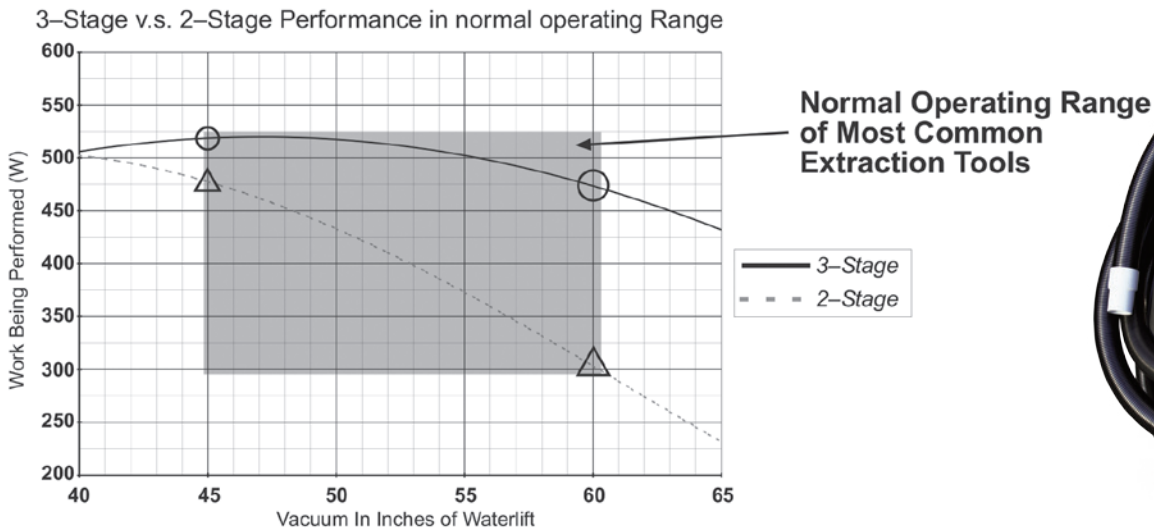

From experiments, we have found that the normal operating range with common extraction tools is about 60 inches of waterlift on the first pass on saturated carpets where most of the water extraction takes place. On later passes where there is less water in the carpet, work occurs at around 45 inches of waterlift. As you can see from the graph, at 60 inches in waterlift the 3-stage can generate 474 W of work and the 2-stage generates 303 W where watts is the amount of work being performed. The 3-stage vacuum system is designed to be most efficient and most effective in the normal operating range, giving it the ability to accomplish more work. So, on the initial pass of a flooded carpet, where most of the water extraction takes place, the 3-stage vacuum will do more work or extract more water. This means better performance, higher production and better results.

Specifications

	Flood King
Power Cord	One, 25 ft, 12 gauge, 3-wire hospital grade plug
Power Consumption	13 amps
Recovery Capacity	9 gal
Vacuum Intake Hose	2 in x 25 ft
Vacuum Motors	Two 3-stage vacuums
Waterlift / CFM	100 in / 170 CFM
Air Watts	520 (in operational range)
Overflow Protection	Electronic float / Auto on/off
Discharge Pumps	Two diaphragm bilge pumps
Discharge Hose	One 3/4 in x 50 ft
Discharge Rate	10.5 gpm
Filter System	One 80 micron polyester mesh strainer at the water inlet to the recovery tank. Two 50 mesh S/S filters in recovery tank Two 50 mesh S/S screens in-line
Weight	88 lb
Part Number	FLOODKING FEW-16 (AquaWand™)

Specifications are subject to change without notice.

9435 Winnetka Avenue North • Brooklyn Park, MN 55445
Phone: 1-800-257-7982 • Fax: 1-800-910-5294 • www.usproducts.com

U.S. PRODUCTS
Innovative Cleaning Solutions